Overview

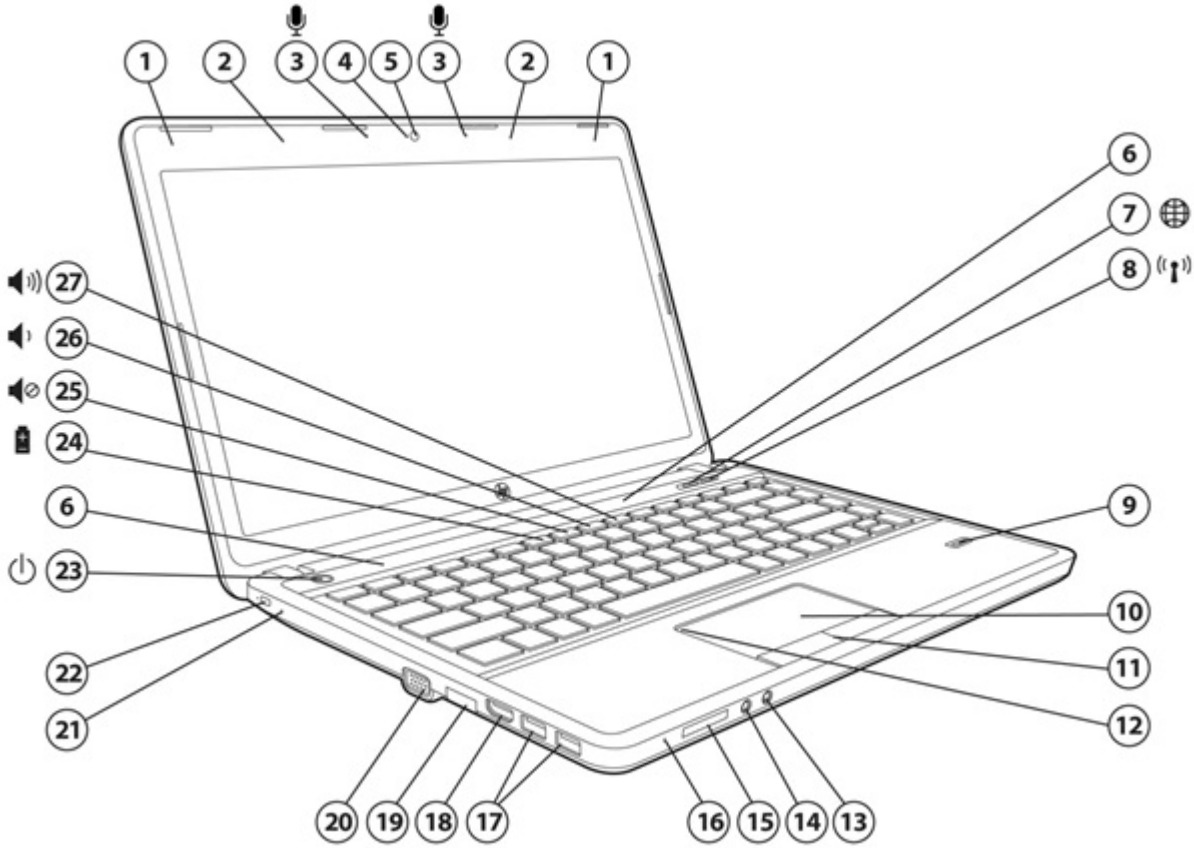

1. WWAN antennas (select models)
2. WLAN antennas
3. Dual-microphone array*
4. Webcam LED indicator (with optional webcam)
5. Optional 720p HD webcam
6. Stereo speakers
7. HP WebBrowser button with LED indicator
8. Wireless on/off button with LED indicator
9. Optional HP Fingerprint Sensor
10. Touchpad
11. Touchpad pick buttons
12. Touchpad on/off button with LED indicator
13. Stereo microphone in
14. Stereo headphone/line out
15. Media Card Reader
16. Hard drive activity LED indicator
17. (2) USB 3.0 ports
18. HDMI 1.4a port
19 RJ-45/Ethernet port
20. VGA/external monitor connector
21. AC Adapter/battery light
22. Security cable slot
23. Power button with LED indicator
24. HP Power Assistant function key
25. Volume mute function key
26. Volume down function key
27. Volume up function key

* Models without optional webcam have single integrated microphone.

Overview

Right View

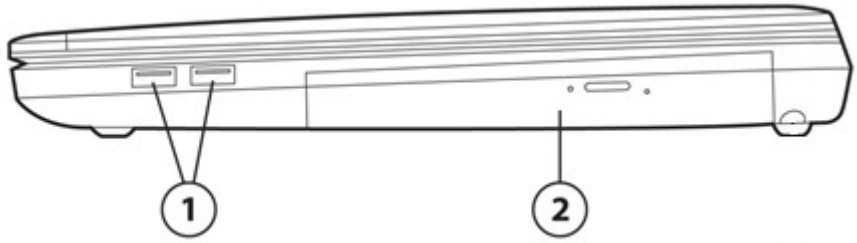

1. (2) USB 2.0 ports
2. Optical drive (select models)

Bottom View

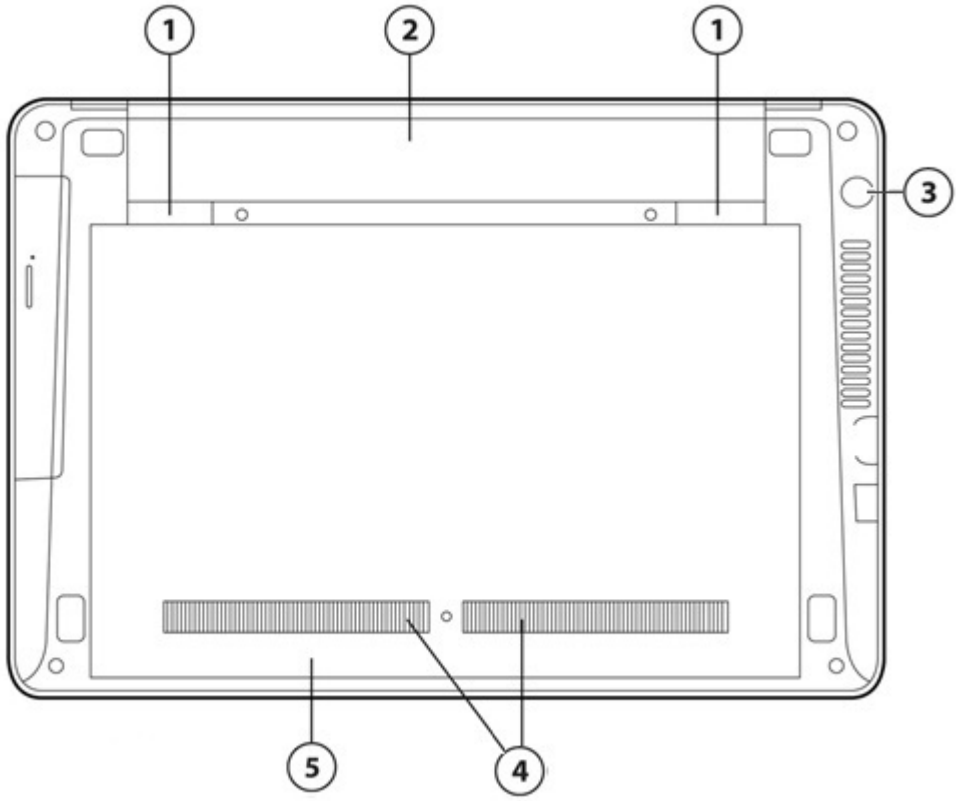

1. Battery and service door release latches
2. Battery bay
3. Power connector
4. Vents
5. Service door

HP ProBook 4540s Notebook PC
HP ProBook 4740s Notebook PC

Overview

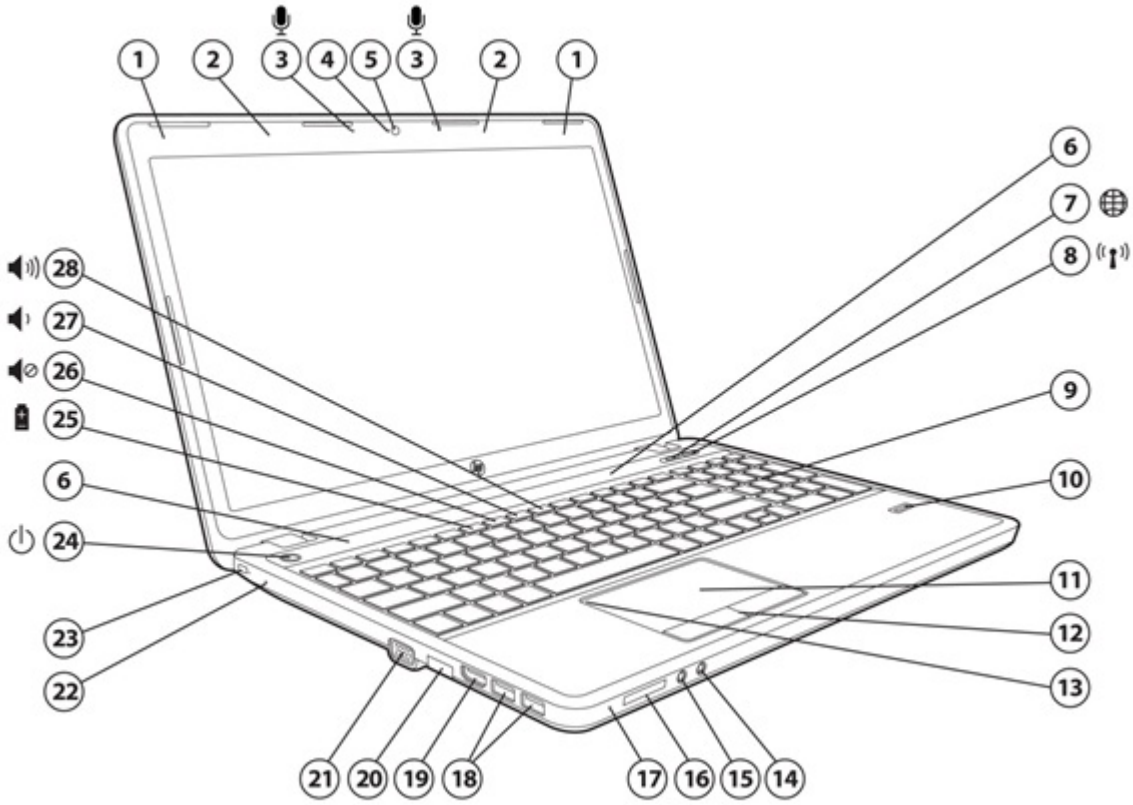

1. WWAN antennas (select models)
2. WLAN antennas
3. Dual-microphone array*
4. Webcam LED indicator (with optional webcam)
5. Optional 720p HD webcam
6. Stereo speakers
7. HP WebBrowser button with LED indicator
8. Wireless on/off button with LED indicator
9. Numeric keypad
10. Optional HP Fingerprint Sensor
11. Touchpad
12. Touchpad pick buttons
13. Touchpad on/off button with LED indicator
14. Stereo microphone in
15. Stereo headphone/line out
16. Media Card Reader
17. Hard drive activity LED indicator
18. (2) USB 3.0 ports
19 HDMI 1.4a port
20. RJ-45/Ethernet port
21. VGA/external monitor connector
22. AC adapter/battery light
23. Security cable slot
24. Power button with LED indicator
25. HP Power Assistant function key
26. Volume mute function key
27. Volume down function key
28. Volume up function key

* Models without optional webcam have single integrated microphone.

Overview

Right View

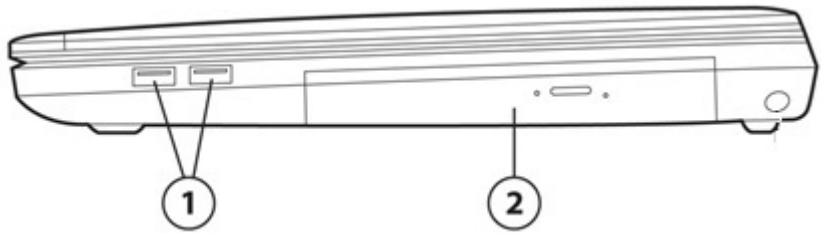

1. (2) USB 2.0 ports
2. Optical drive (select models)

Bottom View

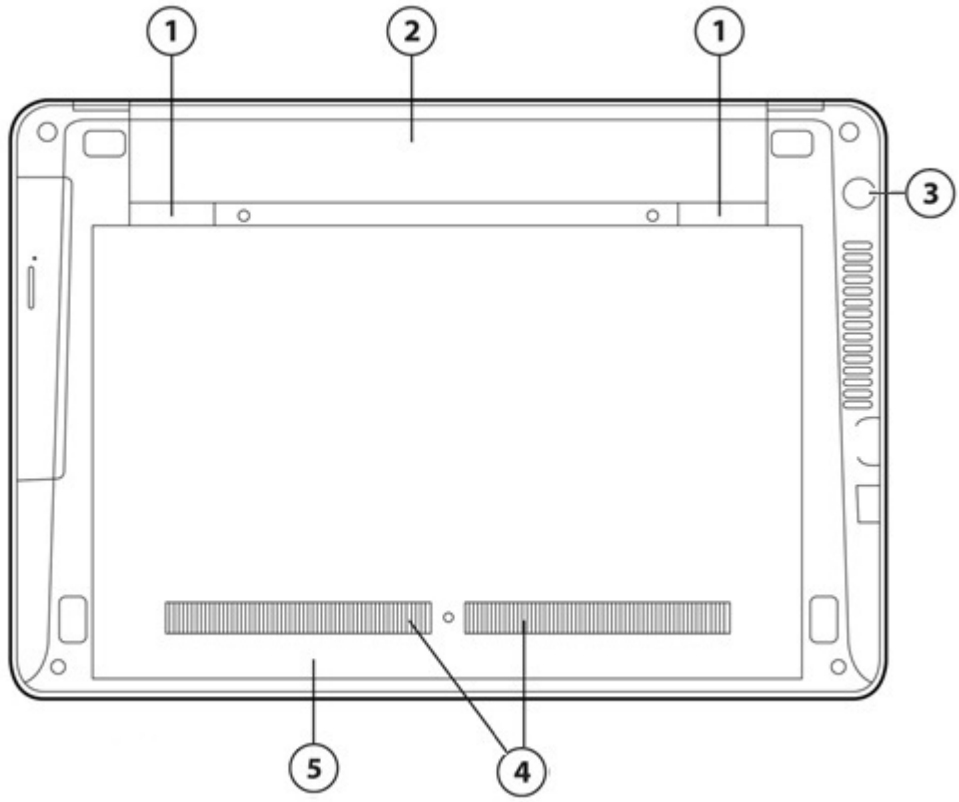

1. Battery and service door release latches
2. Battery bay
3. Power connector
4. Vents
5. Service door

Overview

At A Glance

- Genuine Windows 7 versions, SUSE Linux, or FreeDOS
- Thin, lightweight design with brushed aluminum finish for durability and style, wear-resistant HP DuraFinish
- Full-sized spill-resistant keyboard; full separate numeric keypad on HP ProBook 4540s and 4740s
- Larger Touchpad with gestures support, on/off button with LED indicator
- Enhanced security features including HP ProtectTools, HP Face Recognition, optional HP Fingerprint Sensor
- Optional HD webcam with dual-microphone array for video conferencing*
- HDMI port for connecting to high-resolution displays; USB 3.0 ports
- ArcSoft TotalMedia Suite for playing, creating, and editing video and audio files
- SRS Premium Sound optimized for high fidelity audio
- Widescreen LED-backlit HD display with 16:9 aspect ratio
  HP ProBook 4440s/1s: 14.0-inch diagonal HD, BrightView optional
  HP ProBook 4540s: 15.6-inch diagonal HD
  HP ProBook 4740s: 17.3-inch diagonal HD+
- Choice of 3rd generation Intel® Core™ i7, i5 and i3 processors, 2nd generation Core™ i5, i3, and Intel Celeron processor
- HP WebBrowser button for convenient online access without long boot-up times
- Flexible wireless connectivity options controlled by HP Connection Manager:
  - Integrated HP Mobile Broadband Module*
  - Integrated 802.11 b/g/n wireless LAN module
  - Integrated 802.11 a/b/g/n or b/g/n with Bluetooth 4.0 High Speed (HS) combo card**
- HP Power Assistant to conserve power, increase battery run-time, monitor power needs, report workforce power consumption
- BFR/PVC-free***, ENERGY STAR qualified and EPEAT Gold registered in the U.S. EPEAT status varies by country- please see epeat.net.

* Available only on HP 4440s/1s/4540s with integrated graphics only.
*** Available on select models.
**** Meeting the industry definition of 'BFR/PVC-free' per the iNEMI Position Statement on "Low Halogen" Electronics. Plastic parts incorporated into the chassis generally contain < 1000 ppm (0.1%) of bromine or chlorine. Printed circuit board and substrate laminates generally contain < 1500 ppm (0.15%) of total bromine and chlorine. Service parts after purchase may not be BFR/PVC-free. External accessories, including power supplies, power cords, and peripherals as well as the following customer-configurable internal components: ATT SIM card are not BFR/PVC-free.

OPERATING SYSTEM

Preinstalled	Genuine Windows 7 Professional 64* Genuine Windows 7 Home Premium 64* Genuine Windows 7 Home Basic 64* SUSE Linux Enterprise Desktop 11 FreeDOS
Supported	Genuine Windows 7 Professional 32 Genuine Windows 7 Home Premium 32 Genuine Windows 7 Home Basic 32
Certified	Microsoft WHQL SUSE Linux

*Not all features are available in all editions of Windows 7. This system may require upgraded and/or separately purchased hardware to take full advantage of Windows 7 functionality. See http://www.microsoft.com/windows/windows-7/ for details.

PROCESSOR

3rd Generation Intel® Core™ i7-3632QM (2.2 GHz, 6 MB L3 cache, 4 cores)*
Up to 3.20 GHz with Intel Turbo Boost Technology
3rd Generation Intel® Core™ i7-3612QM (2.1 GHz, 6 MB L3 cache, 4 cores)*
Up to 3.10 GHz with Intel Turbo Boost Technology
3rd Generation Intel® Core™ i5-3360M (2.8 GHz, 3 MB L3 cache, 2 cores)*
Up to 3.50 GHz with Intel Turbo Boost Technology
3rd Generation Intel® Core™ i5-3320M (2.6 GHz, 3 MB L3 cache, 2 cores)*
Up to 3.30 GHz with Intel Turbo Boost Technology
3rd Generation Intel® Core™ i5-3210M (2.5 GHz, 3 MB L3 cache, 2 cores)*
Up to 3.10 GHz with Intel Turbo Boost Technology
3rd Generation Intel® Core™ i3-3120M (2.5 GHz, 3 MB L3 cache, 2 cores)*
3rd Generation Intel® Core™ i3-3110M (2.4 GHz, 3 MB L3 cache, 2 cores)*
2nd Generation Intel® Core™ i5-2450M (2.5 GHz, 3 MB L3 cache, 2 cores)*
Up to 3.10 GHz with Intel Turbo Boost Technology
2nd Generation Intel® Core™ i3-2370M (2.4 GHz, 3 MB L3 cache, 2 cores)*
2nd Generation Intel® Core™ i3-2350M (2.3 GHz, 3 MB L3 cache, 2 cores)*
2nd Generation Intel® Celeron™ B840 (1.9 GHz, 2 MB L3 cache, 2 cores)

* Multi-Core is designed to improve performance of certain software products. Not all customers or software applications will necessarily benefit from use of this technology. 64-bit computing on Intel® architecture requires a computer system with a processor, chipset, BIOS, operating system, device drivers, and applications enabled for Intel® 64 architecture. Processors will not operate (including 32-bit operation) without an Intel® 64 architecture-enabled BIOS. Performance will vary depending on your hardware and software configurations. Intel's numbering is not a measurement of higher performance.
NOTE: Processor speed denotes maximum performance mode; processors will run at lower speeds in battery optimization mode.

CHIPSET

Mobile Intel HM76

Features

GRAPHICS

Integrated:
Intel HD Graphics 4000 (3nd Generation Intel Quad-Core i7; Dual-Core i5 and i3)
Intel HD Graphics 3000 (2nd Generation Intel Dual-Core i5 and i3)
Intel HD Graphics (2nd Generation Intel Celeron configurations)
Discrete:
AMD Radeon™ HD 7650M, with 1 GB and 2 GB dedicated DDR3 video memory

DISPLAY

HP ProBook 4440s/1s:

Internal
14" diagonal LED-backlit HD anti-glare or BrightView (1366 x 768)
External
Up to 32-bit per pixel color depth
VGA
Port supports resolutions up to 2048 x 1536 external resolution @75 Hz
HDMI
Supports direct connection to high-definition displays with up to 1920 x 1200@60Hz resolution and 7-channel audio with one convenient cable (not included)

HP ProBook 4540s:

Internal
15.6" diagonal LED-backlit HD anti-glare (1366 x 768)
External
Up to 32-bit per pixel color depth
VGA
Port supports resolutions up to 2048 x 1536 external resolution @75 Hz
HDMI
Supports direct connection to high-definition displays with up to 1920 x 1200@60Hz resolution and 7-channel audio with one convenient cable (not included)

HP ProBook 4740s:

Internal
17.3" diagonal LED-backlit HD+ anti-glare (1600 x 900)
External
Up to 32-bit per pixel color depth
VGA
Port supports resolutions up to 2048 x 1536 external resolution @75 Hz
HDMI
Supports direct connection to high-definition displays with up to 1920 x 1200@60Hz resolution and 7-channel audio with one convenient cable (not included)

NOTE: HD content required to view HD images.
NOTE: Resolutions are dependent upon monitor capability, and resolution and color depth settings.

STORAGE AND DRIVES

Primary Storage Bay
Hard Drives
320/500/750 GB 7200 rpm SMART SATA II
320/500/640/750 GB 5400 rpm SMART SATA II
HP 3D DriveGuard (Windows only)
The hard drive is mounted directly to the notebook frame, reducing the transmission of shock to the hard drive

NOTE: Up to 19 GB is reserved for the system recovery software.

OPTICAL DRIVES

Fixed 12.7 mm SATA optical drive
Blu-ray ROM DVD+/-RW SuperMulti DL Drive
DVD+/-RW SuperMulti DL Drive
Weight saver

MEMORY

Standard
DDR3 PC3-10600 SDRAM (1333 MHz)
Two SODIMM slots supporting dual-channel memory
2 GB and 4 GB SODIMMs
Maximum
Upgradeable to 8192 MB with optional 4096 MB SODIMMs in slots 1 and 2
Dual-channel
Maximized dual-channel performance requires SODIMMs of the same size and speed in both memory slots.

NOTE: Due to the non-industry standard nature of some third-party memory modules, we recommend HP branded memory to ensure compatibility. If you mix memory speeds, the system will perform at the lower memory speed. With Windows Starter 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements.

Features

NETWORKING/COMMUNICATIONS

Wireless

Support for a broad range of secure, integrated wireless LAN and wireless WAN options featuring support for the latest industry standards. Broadband Wireless (WWAN) requires a Windows operating system and is available in select countries as a standard, factory configurable feature only. Integrated Bluetooth is also available (factory configurable only) and can be combined with any of the supported wireless LAN and wireless WAN options.

Broadband Wireless (WWAN)

HP hs2350 HSPA+ Mobile Broadband Module

HP un2430 EV-DO/HSPA/CDMA Mobile Broadband Module

Wireless LAN (WLAN)

Ralink 802.11 b/g/n (1x1)

Atheros 802.11 b/g/n (1x1)

Atheros 802.11 b/g/n (1x1) with Bluetooth® v4.0 combo

Ralink 802.11 b/g/n (1x1) with Bluetooth® v4.0 combo

Atheros 802.11 b/g/n (2x2) with Bluetooth® v4.0 combo

Intel 802.11 b/g/n (2x2) with Bluetooth® v4.0

Intel 802.11 a/b/g/n (2x2) with with Bluetooth® v4.0

Communications

Realtek 10/100/1000* Ethernet Controller

* The term "10/100/1000" or "Gigabit" Ethernet indicates compatibility with IEEE standard 802.3ab for Gigabit Ethernet, and does not connote actual operating speed of 1 Gb/s. For high-speed transmission, connection to a Gigabit Ethernet server and network infrastructure is required.

AUDIO/MULTIMEDIA

Audio

SRS Premium Sound
Integrated stereo speakers
Integrated microphone (dual-microphone array when equipped with optional webcam)
Function keys for volume mute, volume up, volume down; play, rewind, and fast-forward of video and audio files
Stereo headphone/line out
Stereo microphone/line in

Webcam

Optional 720p HD webcam

- HD format (widescreen)
- Supports videoconferencing (non-HD) and still image capture
- High quality fixed focus lens
- Video capture at various resolutions up to 1280x720 resolution (720p) and up to 30fps
- M-JPEG compression supports higher frame rates for video capture and videoconferencing
- Improved low light sensitivity
- Improved dynamic range

Features

KEYBOARDS/POINTING DEVICES/BUTTONS & FUNCTION KEYS

Keyboard

The HP spill-resistant keyboard is designed using a thin layer of Mylar film under the keyboard. The 101/102-key compatible keyboard features a full-pitch key layout with desktop keyboard features, such as editing keys, both left and right control and alt keys, and function keys. US and International key layouts are available. The HP ProBook 4540s and 4740s include a separate numeric keypad.

Pointing Devices

Touchpad with gestures support, on/off button with LED indicator, two-way scroll, two pick buttons

Buttons and Function Keys

Separate launch buttons provide easy access to wireless on/off and HP WebBrowser. Function keys provide control of features including: standby mode, display brightness, external display, HP Power Assistant, volume mute, volume down, volume up, and media control.

SOFTWARE AND SECURITY

Preinstalled Software with Windows Operating System

HP Recovery Manager
HP Support Assistant
HP Hotkey Support Software
HP Power Assistant
HP Connection Manager
HP Wireless Assistant
Intel Wireless Display*
ArcSoft Total Media Suite
Microsoft® Office Starter: reduced-functionality Word and Excel® only, with advertising. No PowerPoint® or Outlook®. Buy Office 2010 to use the full-featured software.**
WinZip

NOTE: HP Recovery Manager enables fast recovery of the factory preinstalled image if the system becomes corrupted or if important system files are accidentally deleted. Up to 19 GB of the hard drive is reserved for the system recovery software. Support in Windows Operating System only.

*Integrated Intel Wi-Di feature is available on select configurations only and requires separately purchased projector, tv or computer monitor with an integrated or external Wi-Di receiver. External Wi-Di receivers connect to the projector, tv or computer monitor via a standard HDMI cable, also sold separately.

** Includes reduced functionality versions of Word and Excel. Purchase of Product Key required to activate full Office 2010 suite available at participating resellers/retailers and http://www.office.com.

Security

Standard

HP ProtectTools
Drive Encryption for HP ProtectTools
Credential Manager for HP ProtectTools
HP ProtectTools Security Manager
HP Spare Key
File Sanitizer for HP ProtectTools
Enhanced Pre-Boot Security
HP Face Recognition
HP Disk Sanitizer
Security Lock slot

Features

Optional
Security Lock
Intel AT (requires a Computrace subscription)*
HP Fingerprint reader
Microsoft Security Essentials

NOTE: The Computrace agent is shipped turned off, and must be activated by customers when they purchase a subscription. Subscriptions can be purchased for terms ranging multiple years. Service is limited, check with Absolute for availability outside the U.S.

* Intel AT security requires a separately purchased Absolute Computrace service subscription and must be activated and configured. Check with Absolute for availability in your country. Intel and HP assume no liability for lost or stolen data and/or systems or any other damages resulting therefrom. See http://www.intel.com/technology/anti-theft/.

For more information on HP security solutions refer to: http://www.hp.com/go/security.

POWER

Power Supply

4440s/1s and 4540s
Models with discrete graphics:
External 90W HP Smart AC Adapter
Models with integrated graphics:
External 65W HP Smart AC Adapter
Power cord included is 6-foot (1.8 meter).
Total length including external AC adapter is 12 feet (3.66 meter).
HP Fast Charge

4740s
External 90W HP Smart AC Adapter
Power cord included is 6-foot (1.8 meter).
Total length including external AC adapter is 12 feet (3.66 meter).

Primary Battery

4440s/1s and 4540s
HP 9-cell Lithium-Ion Battery (93 WHr)
HP 6-cell Lithium-Ion Battery (47 WHr)

4740s
HP 8-cell Lithium-Ion Battery (73 WHr)

Battery Life*

	Configurations with integrated graphics	Configurations with discrete graphics (1 GB)
HP ProBook 4440s		
9-cell (93 WHr) battery	Up to 14 hours 30 minutes	Up to 14 hours 30 minutes
6-cell (47 WHr) battery	Up to 7 hours 30 minutes	Up to 7 hours 30 minutes
HP ProBook 4540s		

Features

9-cell (93 WHr) battery	Up to 13 hours 45 minutes	Up to 13 hours 45 minutes
6-cell (47 WHr) battery	Up to 7 hours	Up to 7 hours
HP ProBook 4740s		
8-cell (73 Whr) battery	Not applicable	Up to 10 hours 30 minutes

System Standby Time
Up to 1 week

*Battery life will vary depending on the product model, configuration, loaded applications, features, use, wireless functionality and power management settings. The maximum capacity of the battery will naturally decrease with time and usage. See MobileMark07 battery benchmark http://www.bapco.com/products/mobilemark2007 for additional details.
** Configurations with integrated graphics.
NOTE: Fast Charge recharges your battery up to 90% within 90 minutes when the system is off. Please note that 9-cell batteries do not support Fast Charge.

Power Conservation
Supports enhanced Intel SpeedStep technology (allows Battery Optimized Mode, Maximum Performance Mode, or Automatic mode)
AMD PowerPlay technology (discrete models)
Hibernation
Standby
ACPI compliance

ENVIRONMENTAL

ENERGY STAR
IT ECO Declaration
EPEAT Gold where HP registers commercial notebook products. See http://www.epeat.net for registration status in your country.

NOTE: This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks.

WEIGHTS & DIMENSIONS

4440s/1s

Weight
Starting at 4.85 lb (2.20 kg) with optical drive
Starting at 4.55 lb (2.07 kg) without optical drive (weight will vary by configuration)

Dimensions (w x d x h)
13.35 x 9.27 x 1.10 in
33.9 x 23.5 x 2.8 cm (at front)

4540s

Weight
Starting at 5.45 lb (2.47 kg) with optical drive
Starting at 5.14 lb (2.33 kg) without optical drive (weight will vary by configuration)

Features

Dimensions (w x d x h)
14.76 x 10.09 x 1.13 in
37.5 x 25.6 x 2.8 cm (at front)

4740s

Weight
Starting at 6.72 lb (3.05 kg) with optical drive
Starting at 6.44 lb (2.92 kg) without optical drive (weight will vary by configuration)

Dimensions (w x d x h)
16.29 x 11.00 x 1.15 in
41.3 x 27.9 x 2.9 cm (at front)

NOTE: Height varies depending upon where on the notebook the measurement is made. Weight varies by configuration and components. Weight includes 6-cell battery, hard drive, 1 GB memory, and no optical drive. Weight varies by configuration and components.

PORTS/SLOTS

Ports

VGA - One
USB 3.0 - Two
USB 2.0 - Two
HDMI 1.4a - One
Stereo microphone input - One
Headphone/line out - One
RJ-45 (Ethernet) - One
Power connector - One

Digital Media Slots
1 Multi-media Reader Slot supporting SD, SDHC, SDXC, MMC, MMC+, Memory Stick

SERVICE AND SUPPORT

HP Services offers limited 3-year, 1-year and 90-day warranty options depending on country;
1-year limited warranty on primary battery. On-site service and warranty upgrades are also available. HP Care Pack Services extend service contracts beyond the standard warranties. To choose the right level of service for your HP product, use the HP Care Pack Services Lookup Tool at: http://www.hp.com/go/lookuptool. Additional HP Care Pack Services information by product is available at: http://www.hp.com/hps/carepack.

NOTE: Certain restrictions and exclusions apply. Consult the HP Customer Support Center for details.
http://h20000.www2.hp.com/bizsupport/TechSupport/ProductRoot.jsp

SYSTEM UNIT

Stand-Alone Power Requirements (AC Power)	**Nominal Operating Voltage**	19 V
	Average Operating Power	Integrated graphics: TBD W Discrete graphics: TBD W
	Max Operating Power	< 65 W or < 90 W
Temperature	**Operating**	32° to 95° F (0° to 35° C) (not writing optical) 41° to 95° F (5° to 35° C) (writing optical)
	Non-operating	-4° to 140° F (-20° to 60° C)
Relative Humidity	**Operating**	10% to 90%, non-condensing
	Non-operating	5% to 95%, 101.6° F (38.7° C) maximum wet bulb temperature
Shock	**Operating**	40 G, 2 ms, half-sine
	Non-operating	200 G, 2 ms, half-sine
Random Vibration	**Operating**	0.75 grms
	Non-operating	1.50 grms
Altitude (unpressurized)	**Operating**	-50 to 10,000 ft (-15.24 to 3,048 m)
	Non-operating	-50 to 40,000 ft (-15.24 to 12,192 m)
Planned Industry Standard Certifications	**UL**	Yes
	CSA	Yes
	FCC Compliance	Yes
	ENERGY STAR®	Select models*
	EPEAT	Registered Gold in United States**
	ICES	Yes
	Australia / NZ A-Tick Compliance	Yes
	CCC	Yes
	Japan VCCI Compliance	Yes
	KC	Yes
	BSMI	Yes
	CE Marking Compliance	Yes
	BNCI or BELUS	Yes
	CIT	Yes
	GOST	Yes
	Saudi Arabian Compliance (ICCP)	Yes
	SABS	Yes
	UKRSERTCOMPUTER	Yes

* Configurations of the HP ProBook 4440s/1s, HP ProBook 4540s and HP ProBook 4740s that are ENERGY STAR qualified are identified

as HP ProBook 4440s/1s ENERGY STAR, HP ProBook 4540s ENERGY STAR, and HP ProBook 4740s ENERGY STAR on HP websites and on www.energystar.gov.
** EPEAT registration varies by country. See www.epeat.net for registration status by country.
EPEAT status listed above applies to U.S.

For accessibility information on HP products, please visit: http://www.hp.com/accessibility.

DISPLAY

17.3-inch LED HD+ anti-glare	**Active Area** (W x H)	15.0 x 8.5 in (38.2 x 21.5 cm)	
	Diagonal Size	17.3 in (43.9 cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 typical	
	Refresh Rate	60 Hz	
	Brightness	200 nit typical	
	Pixel Resolution	**Pitch**	0.23868 x 0.23868 mm
		Format	1600 x 900
		Configuration	RGB Stipe
	Backlight	LED	
	PPI	107	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

15.6-inch LED HD (1366 x 768) anti-glare	**Dimensions** (W x H)	13.54 x 7.59 in (34.4 x 19.4 cm)	
	Diagonal Size	15.6 in (39.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (min)	
	Refresh Rate	60 Hz	
	Brightness	210 nit (typical)	
	Pixel Resolution	**Pitch**	0.252 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	101 ppi	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

Technical Specifications

14.0-inch LED HD (1366 x 768) anti-glare	**Dimensions** (W x H)	12.74 x 7.56 in (32.4 x 19.2 cm)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	Anti-glare	
	Contrast Ratio	400:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	**Pitch**	0.227 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	112 ppi	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

14.0-inch LED HD (1366 x 768) BrightView	**Active Area** (W x H)	12.16 x 6.85 in (30.9 x17.4 cm)	
	Diagonal Size	14.0 in (35.6cm)	
	Surface Treatment	BrightView (glossy)	
	Contrast Ratio	500:1 (typical)	
	Refresh Rate	60 Hz	
	Brightness	200 nit (typical)	
	Pixel Resolution	**Pitch**	0.227 mm
		Format	1366 x 768
		Configuration	RGB Stripe
	Backlight	LED	
	PPI	112 ppi	
	Viewing Angle	±30° Horizontal, ±10° Vertical (minimum) 30/30/20/10 (Left/Right/Down/Up) (minimum) or 45/45/35/25 (Left/Right/Down/Up) (typical)	

STORAGE AND DRIVES

Internal Storage

Technical Specifications

750 GB 7200 rpm SATA Hard Drive	**Drive Weight**	0.25 lbs (115g)	
	Capacity	750 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	1,465,149,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

500 GB 7200 rpm SATA Hard Drive	**Drive Weight**	0.25 lbs (115g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

320 GB 7200 rpm SATA Hard Drive	**Drive Weight**	0.25 lbs (115 g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	1.5 ms
		Average	11 ms
		Maximum	22 ms
	Rotational Speed	7200 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	
750 GB 5400 rpm SATA Hard Drive	**Drive Weight**	0.27 lb (125 g) or 0.22 lb (101 g)	
	Capacity	750 GB	
	Height	0.50 in (12.7 mm) or 0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	1,465,149,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

640 GB 5400 rpm SATA Hard Drive	**Drive Weight**	0.22 lb (101 g)	
	Capacity	6400 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	1,250,263,728	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

500 GB 5400 rpm SATA Hard Drive	**Drive Weight**	0.22 lb (101 g)	
	Capacity	500 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	976,773,168	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Technical Specifications

320 GB 5400 rpm SATA Hard Drive	**Drive Weight**	0.22 lb (101 g)	
	Capacity	320 GB	
	Height	0.37 in (9.5 mm)	
	Width	2.75 in (70 mm)	
	Interface	ATA-8, SATA 2.6, 3.0 Gb/s, NCQ	
	Transfer Rate	**Synchronous** (maximum)	300 MB/s (Drive Capability)
	Seek Time (typical reads, including settling)	**Single Track**	3 ms
		Average	13 ms
		Maximum	24 ms
	Rotational Speed	5400 rpm	
	Logical Blocks	625,142,448	
	Operating Temperature	32° to 140° F (0° to 60° C) [case temp]	
	Features	ATA Security	

Optical Drives			
DVD+/-RW SuperMulti DL Drive	**Access Times**	Random	<140ms CD (typical)
			< 160 ms DVD (typical)
	Max Data Transfer Rate	24X CD-ROM	
		8X DVD	
		24X CD-R	
		24X CD-RW	
		8X DVD+R	
		8X DVD+RW	
		8X DVD-R	
		6X DVD-RW	
		6X - DVD+R Dual Layer	
		6X - DVD-R Dual Layer	
		5X DVD-RAM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW, DVD-RAM	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+RW, DVD-R, DVD-RW, DVD-RAM, DVD+R DL, DVD-R DL	
	Max Media Capacity (read)	8.5 GB	
	Max Media Capacity (write)	8.5 GB	
	Transport	Tray Loading	

Blu-ray ROM DVD+/-RW SuperMulti DL Drive	**Access Times**	Random	<190 ms CD-ROM (typical) < 180ms DVD-ROM (typical) <230 ms BD-ROM (typical)
	Max Data Transfer Rate	24X CD-ROM 8X DVD-ROM 24X CD-R 16X CD-RW 8X DVD+R 8X DVD+RW 8X DVD-R 6X DVD-RW 4X - DVD+R Dual Layer 4X - DVD-R Dual Layer 5X DVD-RAM 6X BD-ROM	
	Transfer Mode	UDMA Mode 5	
	Interface	Gen 1 SATA	
	Supported Media (read)	CD-DA, , CD-TEXT, CD-ROM, CD-ROM XA, MIXED MODE CD, CD-I, CD-I Bridge (Photo-CD, Video CD), Multisession CD (Photo-CD, CD-EXTRA, Portfolio, CD-R, CD-RW), CD-R, CD-RW, DVD-ROM (DVD-5, DVD-9, DVD-10, DVD-18), DVD-R, DVD-RW, DVD+R, DVD+RW. DVD-RAM, BD-ROM, BD-R, BD-RE	
	Supported Media (write)	CD-R, CD-RW, DVD+R, DVD+R DL, DVD+RW, DVD-R, DVD-R DL, DVD-RW, DVD-RAM	
	Max Media Capacity (read)	50.0 GB	
	Max Media Capacity (write)	8.5GB	
	Transport	Tray Loading	

SECURITY

HP Fingerprint Sensor (optional)	**Mobile Voltage Operation**	3.0V-3.6V Single Supply
	Operating Temperature	32° - 158°F (0° - 70°C)
	Current Consumption @ 3.3V	Less than 70 mA peak imaging and scrolling Less than 25 mA hardware finger detection Advanced Power Management
	High-Rate Image Capture	Up to 240 image frames /sec
	ESD Resistance	IEC 61000-4-2 Level 4 (±15KV)
	Detection Matrix	192 x 16 Pixels 9.7 mm x 0.81 mm 500 ppi High-Resolution Images

NETWORKING/COMMUNICATIONS

Integrated Realtek RTL8151FH-CG 10/100/1000 NIC	**Ethernet Features**	10 Mbit/s operation (10BASE-T; IEEE 802.3i; IEEE 802.3 clauses 13-14) 100 Mbit/s operation (100BASE-TX; IEEE 802.3u; IEEE 802.3 clauses 21-30) 1000 Mbit/s operation (1000BASE-T; IEEE 802.3ab; IEEE 8023 clauses 40) Auto-Negotiation (Automatic Speed Selection) Full Duplex Operation at all Speeds, Half Duplex operation at 10 and 100 Mbit/s IEEE 802.1p QoS (Quality of Service) Support IEEE 802.1q VLAN support IEEE 802.3x Flow Control (IEEE 802.3 clauses 31-32; configurable) IEEE 802.3az EEE (Energy Efficient Ethernet) Jumbo Frame 9K Auto MDI/MDIX Crossover cable detection
	Power Management Support	ACPI compliant - multiple power modes Situation-sensitive features reduce power consumption Advanced link down power saving for reducing link down power consumption
	Performance Features	TCP/IP/UDP Checksum Offload (configurable) Protocol Offload (ARP & NS) Large send offload and Giant send offload Receiving Side Scaling
	Manageability	Wake-on-LAN from standby and hibernation (Magic Packet and Microsoft Wake-Up Frame); Wake-on-LAN from off (Magic Packet only) PXE 2.1 Remote Boot Statistics Gathering (SNMP MIB II, Ethernet-like MIB, Ethernet MIB (802.3x, clause 30)) Comprehensive diagnostic and configuration software suite Virtual Cable Doctor for Ethernet cable status
	Interface	PCI Express 1.1 x1 to fully support ASPM L0s/L1 and CLKREQ
	NIC Device Driver Name	Realtek PCIe GBE Ethernet Family Controller

Technical Specifications

HP un2430 EV-DO/HSPA Mobile Broadband Module	**Technology/Operating Bands**	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900MHz (UTRA FDD Band II), AWS (UTRA FDD Band IV), 900MHz(UTRA FDD Band VIII), 850MHz (UTRA FDD Band V) 1xEVDO/1xRTT with receive diversity: 850MHz (Band Class0-Cell), 1900MHz (Band Class1-PCS)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class A, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 6 CDMA: 1xEVDO Release 0 and Release A, IS-95A, IS-95B, IS-856, IS-2000
	Wireless Parametric Standards	Meets or exceeds TIA/EIA IS-98-D
	Maximum Data Rates	UMTS (HSPA) - 14.4 Mbps (Download), 5.76Mbps (Upload) CDMA (EVDO Release A) - 3.1 Mbps (Download), 1.8Mbps (Upload)
	GPS	Standalone GPS enabled gpsOneXTRATM™
	GPS Bands	L1 - 1575.42 MHz
	Maximum Output Power	GSM/GPRS/EDGE: 32dBm (+/-1) WCDMA: 24dBm (+0.7/-2.3) CDMA: 24dBm (+0.7/-2)
	Maximum Power Consumption	2750mA (peak); 1100mA (average)
	Power Consumption, Idle Not Connected	20 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	11.5 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 10%
	Temperature, Operating (from TIA/EIA/IS-98-D)	-22° to 158° F (-30° to 70° C) (full RF performance) -22° to 167° F (-30° to 75° C) (reduced RF performance)
	Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-40° to 185° F (-40° to 85° C)
	Humidity, Non-operating	95% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager
	LED Activity	LED Off - Radio Off; Solid LED On - Radio On

Technical Specifications

HP hs2350 HSPA+ Mobile Broadband Module	**Technology/Operating Bands**	GSM/GPRS/EDGE: 850MHz(Cell), 900MHz(EGSM), 1800MHz(DCS), 1900MHz (PCS) UMTS/WCDMA with receive diversity: 2100MHz (UTRA FDD Band I), 1900Mhz (UTRA FDD Band II), 900Mhz(UTRA FDD Band VIII), 850 MHz (UTRA FDD Band V)
	Wireless Protocol Standards	GSM/GPRS/EDGE: Class B, Multi-slot class 10 operation, coding schemes CS1 - CS4 and MSC1 - MSC9. UMTS/WCDMA: Release 99 and Release 7 Advanced Receiver Type 3i
	Wireless Parametric Standards	Complies with 3GPP specifications
	Maximum Data Rates	UMTS (HSPA) - 21 Mbps (Download), 5.76Mbps (Upload)
	GPS	Standalone, A-GPS (Internet- and Network assisted)
	GPS Bands	1575.42 MHz (± 1.023 MHz)
	Maximum Output Power	GSM/EDGE GSM850 & GSM900 bands GPRS: +33 dBm ± 2 dBm (class 4) EGPRS: +27 dBm ± 3 dBm (class E2) DCS1800 & PCS1900 bands GPRS: +30 dBm ± 2 dBm (class 1) EGPRS: +26 dBm +4 / -3 dBm (class E2) UMTS UTRA FDD Bands +24 dBm +4 / -3 dBm (class 3)
	Maximum Power Consumption	2000mA (peak); 600mA (average)
	Power Consumption, Sleep Mode	5 mA
	Power Management	USB selective suspend Integrated notebook wireless button
	Antenna Type	Dual high efficiency 5 band antennae with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express MiniCard, USB 2.0 interface
	Weight	< 12 g
	Dimensions (Length x Width x Thickness)	2.01 x 1.18 x 0.18 in (51 x 30 x 5 mm)
	Voltage, Operating	3.3v +/- 9%
	Temperature, Operating	14° to 149° F (-10° to 65° C) (full RF performance) 14° to 167° F (-10° to 75° C) (reduced RF performance)
	Temperature, Non-operating, 96 hours (from MIL-STD 202 Method 108)	-22° to 185° F (-30° to 85° C)
	Humidity, Non-operating	85% relative humidity for 48 hours @ 185° F (85° C) (non-condensing)
	Configuration Utilities	HP Connection Manager

	LED Activity	LED Off - Radio Off; Solid LED On - Radio On
Intel Centrino Advanced - N 6235 802.11a/g/n (2x2) Bluetooth v4.0 combo	**Wireless LAN Standards**	IEEE 802.11a IEEE 802.11b IEEE 802.11g IEEE 802.11n
	Interoperability	Wi-Fi certified Cisco Compatible Extensions Program compliant with Microsoft Windows 7, Windows Vista and XP (details at: http://www.hp.com/go/notebooks/WLAN)
	Frequency Band	2.4 GHz and 5 GHz
	Data Rates	802.11a: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: 66 possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security[1]	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST. Support for Cisco Security Features (proven compatibility with Cisco Aironet infrastructure products through the Cisco Compatible Extensions Program Version 5) with Microsoft Windows 7, Windows Vista and XP only.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output Power[2]	13.5 dBm , nominal
	Power Consumption	Idle associated: 250 mW Idle unassociated: 100 mW Radio disabled: 75mW Transmit: 2.0 W (max) Receive: 1.6 W (max)
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity[3]	54 Mbps: -71 dBm, 11 Mbps: -85 dBm , 1 Mbps: -95 dBm
	Antenna Connections	High efficiency dual band antenna with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express Half-MiniCard 1.2
	Weight	0.013 lb (6 g)

Technical Specifications

	Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)	
	Operating Voltage	3.3v +/- 10%	
	Temperature	Operating Non-operating	14° to 158° F (-10° to 70° C) -40° to 176° F (-40° to 80° C)
	Humidity	Operating Non-operating	10% to 90% (non-condensing) 5% to 95% (non-condensing)
	Altitude	Operating Non-operating	0 to 10,000 ft (3,048 m) 0 to 50,000 ft (15,240 m)
	Configuration Utility[4]	Microsoft Windows XP Choice of Configuration Utility: • Microsoft Windows XP Wireless Network Connection Manager • Broadcom Wireless Configuration Utility (required for Cisco Compatible Extensions support) Microsoft Windows Vista • Microsoft Windows Vista Wireless Network Connection Manager • Broadcom IHV extensions for Windows Vista available to support Cisco Compatible Extensions. Microsoft Windows 7 • Microsoft Windows 7 Wireless Network Connection Manager • Broadcom IHV extensions for Windows 7 available to support Cisco Compatible Extensions.	
	LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON	

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CCK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).
4. WLAN supplier's client utility is required for Cisco Compatible Extensions support with Microsoft Windows XP. WLAN may also be compatible with certain third-party software supplicants. WLAN supplier IHV extensions required for Cisco Compatible Extensions support for Microsoft Windows Vista.

Bluetooth 4.0 Wireless Technology	**Bluetooth Specification**	2.1+EDR, 3.0+HS, 4.0 Compliant
	Dimensions	1.18 x 0.26 x 0.13 in (30 x 6.5 x 3.25 mm)
	Frequency Band	2402 to 2480 MHz
	Number of Available Channels	79 (1 MHz) available channels
	Data Rates and Throughput	3 Mbps data rate; throughput up to 2.17 Mbps Synchronous Connection Oriented links up to 3, 64 kbps, voice channels Asynchronous Connection Less links 2178.1 kbps/177.1 kbps asymmetric or 1306.9 kbps symmetric
	Transmit Power	Max 4 dBm (Bluetooth Class II)
	Receiver Sensitivity	Better than -80 dBM at 0.1 % raw bit error rate

Technical Specifications

Power Consumption	Average 230mW	
	Sleep <1 mW	
Antenna	Internally integrated within module	
Range	Up 33 ft (10 m)	
Electrical Interface	USB 2.0 compliant	
	Microsoft Windows Plug and Play compliant	
Bluetooth Software Supported	Broadcom Bluetooth for Windows	
	Microsoft Windows Bluetooth Software	
Link Topology	Point to Point, Multipoint Pico Nets up to 7 slaves	
Security	Full support of Bluetooth Security Provisions	
Power Management	Microsoft Windows ACPI, and USB Bus Support	
	Self configurable to optimize power conservation in all operating modes, including Standby, Hold, Park, and Sniff	
Certifications	All necessary regulatory approvals for supported countries, including:	
	FCC (47 CFR) Part 15C, Section 15.247 & 15.249	
	ETS 300 328, ETS 300 826	
	Low Voltage Directive IEC950	
	UL, CSA, and CE Mark	
Temperature	Operating	-4° to 158° F (-20° to 70° C)
	Non-operating	-40° to 176° F (-40° to 80° C)
Humidity	Operating	10% to 90%
	Non-operating	5% to 95%
Altitude	Operating	15,000 ft (4,572 m)
	Non-operating	40,000 ft (12,192 m)
Bluetooth Profiles Supported	Serial Port Profile (SPP)[1]	
	Service Discovery Applicaton Profile (SDAP)	
	Dial-Up Networking (DUN)[1,2]	
	Generic Object Exchange Profile (GOEP)[1,2]	
	Object Push Profile (OPP)[1,2]	
	File Transfer Profile (FTP)	
	Synchronization Profile (SYNC)	
	Hard Copy Cable Replacement (HCRP)[1,2]	
	Personal Area Networking Profile (PAN)[1,2]	
	Human Interface Device Profile (HID)[1,2,3]	
	FAX Profile (FAX)	
	Basic Imaging Profile (BIP)[2]	
	Headset Profile (HSP)	
	Hands Free Profile (HFP)	
	Advanced Audio Distribution Profile (A2DP)	

1. indicates the profile is supported by Microsoft Windows XP SP2
2. indicates the profile is part of Windows Vista

Atheros AR9485 802.11 b/g/n WiFi Adapter (1x1)	**Wireless LAN Standards**	IEEE 802.11b IEEE 802.11g IEEE 802.11n
	Interoperability	Wi-Fi certified
	Frequency Band	2.4 GHz
	Data Rates	802.11b: 1, 2, 5.5, 11 Mbps 802.11g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps 802.11n: many possible data rates, ranging from 6 Mbps to 300 Mbps, depending on the combination of Bandwidth, Modulation Coding Scheme, and Guard Interval used, as defined in IEEE 802.11n specification
	Modulation	Direct Sequence Spread Spectrum DBPSK, DQPSK, CCK, OFDM, BPSK, QPSK, 16-QAM, 64-QAM
	Security[1]	Supports 64- and 128-bit WEP, WPA, WPA2, hardware-accelerated AES, 802.1x authentication types EAP-TLS, EAP-TTLS, PEAP-GTC, PEAP-MSCHAPv2, LEAP, EAP-FAST.
	Sub-channels	Multinational support with frequency bands and channels compliant to local regulations.
	Media Access Protocol	CSMA/CA (Collision Avoidance) with ACK
	Network Architecture Models	Ad-hoc (Peer to Peer) Infrastructure (Access Point Required)
	Roaming	IEEE 802.11 compliant roaming between access points
	Output2	13.5 dBm, nominal
	Power Consumption	Transmit: 2.0 W (max) Receive: 1.6 W (max) Associated to Access Point, Idle: 250 mW nominal Wireless Button Off: 100 mW nominal Radio disabled: 75 mW nominal
	Power Management	ACPI compliant power management 802.11 compliant power saving mode
	Receiver Sensitivity[3]	72.2 Mbps: -70 dbm, 54 Mbps: -74 dBm, 11 Mbps: -88 dBm , 1 Mbps: -95 dBm
	Antenna Connections	High efficiency antenna with spatial diversity, mounted in the display enclosure
	Form Factor	PCI-Express Half-MiniCard 1.2
	Weight	0.013 lb (6 g)
	Dimensions	0.19 x 1.06 x 1.18 in (4.75 x 26.8 x 30 mm)
	Operating Voltage	3.3v +/- 9%
	Temperature	Operating: 14° to 158° F (-10° to 70° C) Non-operating: -40° to 176° F (-40° to 80° C)
	Humidity	Operating: 10% to 90% (non-condensing) Non-operating: 5% to 95% (non-condensing)
	Altitude	Operating: 0 to 10,000 ft (3,048 m) Non-operating: 0 to 50,000 ft (15,240 m)
	LED Activity	LED Off - Radio OFF; Solid LED On - Radio ON

1. Check latest software/driver release for updates on supported security features.
2. Maximum output power may vary by country according to local regulations.
3. Receiver sensitivity is measured at a packet error rate of 8% for 802.11b (CKK modulation) and a packet error rate of 10% for 802.11a/g (OFDM modulation).

AUDIO/MULTIMEDIA

Hardware	**Implementation**	IDT 92HD87 High Definition CODEC
	Function Key Volume Controls	Volume up, volume down, and mute
	Full Duplex	Yes
	Microphone In	Stereo
	Headphone/Line Out	Stereo
	Integrated Microphone	Yes, dual digital microphone array when equipped with optional webcam
Audio Output Quality	**Frequency Response**	20 Hz - 20 kHz
	Signal to Noise Ratio	>85 dB
	Total Harmonic Distortion	0.01%
	Noise Floor	-110 dB
	Play/Record Sampling Rate(s)	8 kHz - 48kHz
	DAC	16, 20 or 24-bit
	ADC	16 or 20-bit
Internal Stereo Speaker	**Power Rating**	2 Watts
	Impedance	4 ohms

POWER

Technical Specifications

HP 90W Smart AC Adapter (discrete configurations)	**Dimensions**	5.00 x 1.97 x 1.1 in (12.7 x 5.0 x 2.9 cm)	
	Weight	0.82 lb (370 g)	
	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.5 A at 90 VAC, 0.75 A at 180 VAC PFC Version 2.4 A at 90 VAC, 1.2 A at 180 VAC NON PFC Version
	Output	**Output power**	90W
		DC output	19.0V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	**Operating temperature**	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)
		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF- over 200,000 hours at 25°C ambient condition.	

HP 65W Smart AC Adapter (Configurations with integrated graphics)	**Dimensions**	4.17 x 1.85 x 1.1 in (10.6 x 4.7 x 2.8 cm)	
	Weight	0.62 lb (280 g)	
	Input	100 to 240 VAC	
		Input Efficiency	87% min at 115 VAC
		Input frequency range	47 to 63 Hz
		Input AC current	1.7 A at 90 VAC, 0.85 A at 180 VAC
	Output	**Output power**	65W
		DC output	18.5V
		Hold-up time	5 msec at 115 VAC input
		Output current limit	<11A, Over voltage protection- 29V max automatic shutdown
	Connector	3 pin/grounded, mates with interchangeable cords	
	Environmental Design	**Operating temperature**	32° to 104° F (0° to 40° C)
		Non-operating (storage) temperature	-4° to 149° F (-20° to 65° C)

		Altitude	0 to 10,000 ft (0 to 3,048 m)
		Humidity	20% to 80%
		Storage Humidity	10% to 90%
	EMI and Safety Certifications	CE Mark - full compliance with LVD and EMC directives; Worldwide safety standards - IEC60950, EN60950, UL60950, Class1, SELV; Agency approvals - C-UL-US, NORDICS, DENAN, EN55022 Class B, FCC Class B, CISPR22 Class B, CCC, NOM-1 NYCE; MTBF - over 200,000 hours at 25°C ambient condition.	
9-Cell (93 WHr) Lithium-Ion battery	**Dimensions** (H x W x L)	0.8 x 2.9 x 8.3 in (2.0 x 7.3 x 21.0 cm)	
	Weight (max)	1.07 lb (0.488 kg)	
	Cells/Type	9-cell Lithium-Ion	
	Energy	**Watt-hour capacity**	93 WHr
	Temperature	**Operating (Charging)**	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	**System in OFF or Standby Mode**	3 to 4 hours
		System ON	4 to 6 hours (depending on system power consumption)
8-Cell (73 Whr) Lithium-Ion Primary battery	**Dimensions** (H x W x L)	0.8 x 1.9 x 10.6 in (2.0 x 4.8 x 27.0 cm)	
	Weight (max)	0.980 lb (0.445 kg)	
	Cells/Type	8-cell Lithium-Ion	
	Energy	**Watt-hour capacity**	73 Wh
	Temperature	**Operating (Charging)**	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 140° F (-10° to 60° C)
		Non-operating	-4° to 140° F (-20° to 60° C)
	Battery Re-Charge Time	**System in OFF or Standby Mode**	2.5 hours
		System ON	3 to 5 hours (depending on system power consumption)
		HP Fast Charge Technology	Charges the battery up to 90% within 1.5 hours when system is OFF

Technical Specifications

6-Cell (47 WHr) Lithium-Ion battery	**Dimensions** (H x W x L)	0.8 x 1.8 x 10.4 in (2 x 4.5 x 26.5cm)	
	Weight (max)	.70lb, (.312kg)	
	Cells/Type	Lithium-Ion	
	Energy	**Voltage**	10.8V
		Amp-hour capacity	4.4Ah
		Watt-hour capacity	47Wh
	Temperature	**Operating (Charging)**	32° to 113° F (0° to 45° C)
		Operating (Discharging)	14° to 122° F(-10° to 50° C)
		Non-operating	-4° to 122° F (-20° to 50° C)
	Battery Re-Charge Time	**System in OFF or Standby Mode**	2.5 hours
		System ON	3 to 5 hours
	Fuel Gauge LED	No	
	Warranty	1 year	
	Compatible with optional Travel Battery	No	

ENVIRONMENTAL

HP ProBook 4440s/1s Notebook PC

Environmental Data

Eco-Label Certifications	This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks: US ENERGY STAR qualified IT ECO declaration EPEAT Gold with a Microsoft OS where HP registers commercial notebook products. See http://www.epeat.net for registration status in your country.		
System Configuration	The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"		
Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	6.37 W	6.47 W	5.74 W
Sleep (Energy Star low power mode)	0.94 W	1.09 W	0.93 W
Off	0.52 W	0.65 W	0.52 W
Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	22 BTU/hr	22 BTU/hr	20 BTU/hr
Sleep	3 BTU/hr	4 BTU/hr	3 BTU/hr
Off	2 BTU/hr	2 BTU/hr	2 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.4	28
Fixed Disk (random writes)	3.4	29

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion
6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post-consumer recycled plastic (by wt.)

This product is greater than 96.3% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
  - PAPER/Cardboard & misc 325 g
  - PAPER/Corrugated 51 g
- Internal:
  - PLASTIC/Polyethylene low density 15 g

  - PLASTIC/EPE-Expanded Polyethylene 68 g
  - PLASTIC/PET 20 g
  - OTHER/OTHER 20 g
- The PAPER/Cardboard & misc is made from 80% recycled content.
- The PAPER/Corrugated is made from 80% recycled content.
- The PLASTIC/Polyethylene low density is made from 65% recycled content
- The PLASTIC/EPE-Expanded Polyethylene is made from 65% recycled content
- The PLASTIC/PET is made from 65% recycled content
- The OTHER/OTHER is made from 65% recycled content

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

HP ProBook 4540s Notebook PC

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

US ENERGY STAR qualified
IT ECO declaration
EPEAT Gold with a Microsoft OS where HP registers commercial notebook products. See http://www.epeat.net for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	6.16 W	6.50 W	6.14 W
Sleep (Energy Star low power mode)	0.92 W	1.08 W	0.92 W
Off	0.56 W	0.69 W	0.55 W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	21.1 BTU/hr	22.2 BTU/hr	20.9 BTU/hr
Sleep	3.1 BTU/hr	3.6 BTU/hr	3.1 BTU/hr

Off	2 BTU/hr	2.3 BTU/hr	1.8 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.4	30
Fixed Disk (random writes)	3.4	30

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion
6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post-consumer recycled plastic (by wt.)

This product is greater than 96.4% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
  - PAPER/Cardboard & misc 411 g
  - PAPER/Corrugated 51 g
- Internal:

  - PLASTIC/Polyethylene low density 25 g
  - PLASTIC/PET 3 g
  - PLASTIC/EPE-Expanded Polyethylene 60 g
  - OTHER/OTHER 20 g
- The PAPER/Cardboard & misc packaging material is made from 80% recycled content.
- The PAPER/Corrugated packaging material is made from 80% recycled content.
- The PLASTIC/Polyethylene low density packaging material is made from 65% recycled content
- The PLASTIC/PET packaging material is made from 65% recycled content
- The PLASTIC/EPE-Expanded Polyethylene packaging material is made from 65% recycled content
- The OTHER/OTHER packaging material is made from 65% recycled content

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

HP ProBook 4740s Notebook PC

Environmental Data

Eco-Label Certifications

This product has received or is in the process of being certified to the following approvals and may be labeled with one or more of these marks:

US ENERGY STAR qualified
IT ECO declaration
EPEAT Gold with a Microsoft OS where HP registers commercial notebook products. See http://www.epeat.net for registration status in your country.

System Configuration

The configuration used for the Energy Consumption and Declared Noise Emissions data is based on a "Typically Configured Notebook"

Energy Consumption	115 VAC	230 VAC	100 VAC
Normal Operation	6.35 W	7.12 W	6.35 W
Sleep (Energy Star low power mode)	0.94 W	1.08 W	0.93 W
Off	0.63 W	0.76 W	0.64 W

Heat Dissipation*	115 VAC	230 VAC	100 VAC
Normal Operation	21.7 BTU/hr	24.3 BTU/hr	21.7 BTU/hr
Sleep	3.2 BTU/hr	3.6 BTU/hr	3.1 BTU/hr
Off	2.1 BTU/hr	2.5 BTU/hr	2.1 BTU/hr

* Heat dissipation is calculated based on the measured watts, assuming the service level is attained for one hour.

Declared Noise Emissions (in accordance with ISO 7779 and ISO 9296)

System Fan Off	Sound Power (LWAd, bels)	Sound Pressure (LpAm, decibels)
Idle	3.3	30
Fixed Disk (random writes)	3.3	30

System fan is usually off except when charging the battery

Batteries

This battery(s) in this product comply with EU Directive 2006/66/EC

Batteries used in the product do not contain:

- Mercury greater the 5ppm by weight
- Cadmium greater than 10ppm by weight

The battery type and chemistry used in the product is:

CR2032 (coin cell), Li-ion
6-cell high capacity Lithium-Ion battery (optional 8 cell available)

Additional information

This product is in compliance with the Restrictions of Hazardous Substances (RoHS) directive - 2002/95/EC.

This HP product is designed to comply with the Waste Electrical and Electronic Equipment (WEEE) Directive - 2002/96/EC.

This product is in compliance with California Proposition 65 (State of California; Safe Drinking Water and Toxic Enforcement Act of 1986).

This product is in compliance with the IEEE 1680 (EPEAT) standard at the Gold level, see www.epeat.net

Plastics parts weighing over 25 grams used in the product are marked per ISO 11469 and ISO1043.

This product contains 0% post-consumer recycled plastic (by wt.)

This product is greater than 97.2% recycle-able when properly disposed of at end of life.

Packaging Materials

- External:
  - PAPER/Cardboard & misc 480 g
- Internal:
  - PLASTIC/Polyethylene low density 26 g
  - PLASTIC/PET 3 g
  - PLASTIC/EPE-Expanded Polyethylene 55 g
  - OTHER/OTHER 20 g
- The PAPER/Cardboard & misc packaging material is made from 80% recycled content.
- The PAPER/Corrugated packaging material is made from 80% recycled content.
- The PLASTIC/Polyethylene low density packaging material is made from 65% recycled content
- The PLASTIC/PET packaging material is made from 65% recycled content
- The PLASTIC/EPE-Expanded Polyethylene packaging material is made from 65% recycled content
- The OTHER/OTHER packaging material is made from 65% recycled content

HP follows these guidelines to decrease the environmental impact of product packaging:

- Eliminate the use of heavy metals such as lead, chromium, mercury and cadmium in packaging materials.
- Eliminate the use of ozone-depleting substances (ODS) in packaging materials.
- Design packaging materials for ease of disassembly.
- Maximize the use of post-consumer recycled content materials in packaging materials.
- Use readily recyclable packaging materials such as paper and corrugated materials.
- Reduce size and weight of packages to improve transportation fuel efficiency.
- Plastic packaging materials are marked according to ISO 11469 and DIN 6120 standards.

ALL MODELS

MATERIAL USAGE

This product does not contain any of the following substances in excess of regulatory limits (for reference of these limits please refer to the HP General Specification of the Environment (http://www.hp.com/hpinfo/globalcitizenship/environment/supplychain/gen_specifications.html):

- Asbestos
- Certain Azo Colorants
- Certain Brominated Flame Retardants – may not be used as flame retardants in plastics
- Cadmium
- Chlorinated Hydrocarbons
- Chlorinated Paraffins
- Formaldehyde

- Halogenated Diphenyl Methanes
- Lead carbonates and sulfates
- Lead and Lead compounds
- Mercuric Oxide Batteries
- Ozone Depleting Substances
- Polybrominated Biphenyls (PBBs)
- Polybrominated Biphenyl Ethers (PBBEs)
- Polybrominated Biphenyl Oxides (PBBOs)
- Polychlorinated Biphenyl (PCB)
- Polychlorinated Terphenyls (PCT)
- Polyvinyl Chloride (PVC) – except for wires and cables, and certain retail packaging has been voluntarily removed from most applications.
- Radioactive Substances
- Tributyl Tin (TBT), Triphenyl Tin (TPT), Tributyl Tin Oxide (TBTO)
- Nickel finishes that release greater than 0.5 µgrams/cm^2/week, measured according to EN 1811:1998, are not used on any product surface designed to be frequently handled or touched by users.

END-OF-LIFE MANAGEMENT AND RECYCLING

Hewlett-Packard offers end-of-life HP product return and recycling programs in many geographic areas. To recycle your product, please go to: http://www.hp.com/go/reuse-recycle or contact your nearest HP sales office. Products returned to HP will be recycled, recovered or disposed of in a responsible manner.

The EU WEEE directive (2002/95/EC) requires manufacturers to provide treatment information for each product type for use by treatment facilities. This information (product disassembly instructions) is posted on the Hewlett Packard web site at: http://www.hp.com/go/recyclers. These instructions may be used by recyclers and other WEEE treatment facilities as well as HP OEM customers who integrate and re-sell HP equipment.

HEWLETT-PACKARD CORPORATE ENVIRONMENTAL INFORMATION

For more information about HP's commitment to the environment:

Global Citizenship Report
http://www.hp.com/hpinfo/globalcitizenship/gcreport/index.html
Environment website
http://www.hp.com/environment
Eco-label certifications
http://www.hp.com/hpinfo/globalcitizenship/environment/productdesign/ecolabels.html
ISO 14001 certificates:
http://www.hp.com/hpinfo/globalcitizenship/environment/operations/envmanagement.html

Options and Accessories (sold separately and availability may vary by country)

Type	Description	Part #
Memory	HP 2 GB (DDR3 1333 MHz) SODIMM	AT912AA#xxx
	HP 4 GB (DDR3 1333 MHz) SODIMM	AT913AA#xxx
	HP 2 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P63AA#xxx
	HP 4 GB PC3-12800 (DDR3 1600 MHz) SODIMM	H2P64AA#xxx
	NOTE: Full availability of 4 GB or more of memory requires Windows Vista Business 64-bit or Linux. With Windows 32-bit operating systems, the amount of usable memory is dependent upon your configuration, so that above 3 GB all memory may not be available due to system resource requirements. Due to system limitations, DDR3-1600 MHz memory will only be supported at DDR3-1333 MHz.	
Cases	HP Essential Top Load Case	H2W17AA
	HP Essential Backpack	H1D24AA
	HP Essential Messenger Case	H1D25AA
Docking	HP Dual Hinge Notebook Stand	AW661AA
	HP Display and Notebook Stand	AW662AA
	HP 3005pr USB 3.0 Port Replicator	H1L08AA
	HP 2005pr USB 2.0 Port Replicator	H1L07AA
Input/Output - Mice	HP 2.4 GHz Wireless Optical Mobile Mouse	LX732AA
	HP Wireless Mobile Mouse	H2L63AA
	HP USB Essential Keyboard/Mouse	H2S75AA
Adapters	HP 90W Slim Adapter	BT796AA
	HP 90W Smart AC/Auto/Air Combo Adapter	ED493AA
Storage - External Storage	HP Mobile USB DVDRW	A2U57AA
Batteries	HP PR06 Notebook Battery	QK646AA
Health and Education	HP 20-Notebook Managed Charging Cart	QL489AA
	HP 20-Notebook Charging Cart	QL488AA
	HP 30-Notebook Managed Charging Cart	QL490AA
	HP Pocket Whiteboard	A0X37AA

Options and Accessories (sold separately and availability may vary by country)

Copyright © 2012 Hewlett-Packard Development Company, L.P.

All rights reserved. Microsoft, Windows, Windows 7, Windows Vista and Windows XP are registered trademarks or trademarks of Microsoft Corporation in the U.S. and/or other countries. Intel, Core, and Celeron are registered trademarks or trademarks of Intel Corporation in the U.S. and/or other countries. Bluetooth is a registered trademark of Bluetooth SIG, Inc., in the U.S. and other countries. All other product names mentioned herein may be trademarks of their respective companies.

The information contained herein is subject to change without notice and is provided "as is" without warranty of any kind. The warranties for HP products are set forth in the express limited warranty statements accompanying such products. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.